



Model TBB

Twin Bail Beam

- The Twin Bail Beam is an ideal solution for utilizing two hoists to increase lifting capacity. The roller bearing swivel hook allows the load to be rotated at the next manufacturing location and pivots to prevent binding when one end of the beam is raised or lowered more rapidly than the other.
- Top and bottom flange stiffeners are added to strengthen the beam laterally in case of sideward movement caused by shifting of the load.
- All lifters are proof tested exceeding ANSI/ASME B30.20 standards. A test certificate is issued and provided with each lifter. Lifters are painted safety yellow and clearly marked on both sides with rated capacity to conform to OSHA standards.

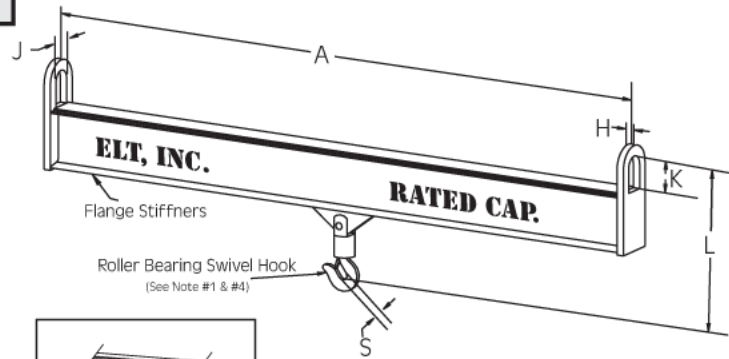

Swivel Hook Option

| Pounds | Inches | | | | | Pounds | Model Number | |
|---------------------------|---------------|---------------------|---------------------------------|-----|-----|---|--------------|-----------------------|
| Capacity (See Note #4) | Length (A) | Total Height (L) | Bail Size (See Note #2 & #3) | | | Maximum Stock Dia. (See Note #1 & #5) (S) | | Approx. Lifter Weight |
| | | | (H) | (J) | (K) | | | |
| 4000 | 72 | 21-7/16 | (3/4 x 3/4) x 2 x 4 | | | 1-11/32 | 164 | TBB-4-72 |
| | 96 | 22-7-16 | | | | | 239 | TBB-4-96 |
| | 120 | 23-7/16 | | | | | 326 | TBB-4-120 |
| 6000 | 72 | 20-7/16 | (3/4 x 1) x 2 x 4 | | | 1-11/32 | 202 | TBB-6-72 |
| | 96 | 21-7/16 | | | | | 291 | TBB-6-96 |
| | 120 | 22-7/16 | | | | | 372 | TBB-6-120 |
| 8000 | 60 | 24-15/16 | (3/4 x 1) x 2 x 4 | | | 1-11/16 | 206 | TBB-8-60 |
| | 96 | 25-15/16 | | | | | 327 | TBB-8-96 |
| | 120 | 25-15/16 | | | | | 391 | TBB-8-120 |
| | 144 | 28-15/16 | | | | | 644 | TBB-8-144 |
| 10000 | 96 | 30-15/16 | (3/4 x 1) x 2 x 6 | | | 1-11/16 | 482 | TBB-10-96 |
| | 120 | 30-15/16 | | | | | 583 | TBB-10-120 |
| | 180 | 30-15/16 | | | | | 1099 | TBB-10-180 |
| | 240 | 33-15/16 | | | | | 1599 | TBB-10-240 |
| 15000 | 96 | 34-1/8 | (1 x 1-1/4) x 3 x 6 | | | 2-1/16 | 632 | TBB-15-96 |
| | 120 | 34-1/8 | | | | | 793 | TBB-15-120 |
| | 180 | 37-1/8 | | | | | 1248 | TBB-15-180 |
| | 240 | 40-1/8 | | | | | 2017 | TBB-15-240 |
| 20000 | 96 | 44-3/32 | (1-1/4 x 1-1/2) x 4 x 10 | | | 2-1/4 | 857 | TBB-20-96 |
| | 120 | 44-3/32 | | | | | 993 | TBB-20-120 |
| | 180 | 47-3/32 | | | | | 1669 | TBB-20-180 |
| | 240 | 44-3/32 | | | | | 2128 | TBB-20-240 |
| 40000 | 120 | 53-1/16 | (1-1/2 x 1-3/4) x 4 x 10 | | | 3-5/8 | 1346 | TBB-40-120 |
| | 180 | 53-1/16 | | | | | 2171 | TBB-40-180 |
| | 240 | 53-1/16 | | | | | 3050 | TBB-40-240 |
| 60000 | 120 | 59-3/8 | (2 x 2-1/4) x 6 x 14 | | | 3-3/4 | 1869 | TBB-60-120 |
| | 180 | 59-3/8 | | | | | 2822 | TBB-60-180 |
| | 240 | 59-3/8 | | | | | 3828 | TBB-60-240 |

Notes:

- Maximum stock diameter refers to the size of material that will fit into the swivel hook opening.
- All loads must be centered under the swivel hook.
- Please verify that the lifting bail size will suit crane hook.
- Other capacities and lengths available upon request.
- Can be supplied with roller bearing swivel hook or standard swivel hook.

ph: 888.358.5438 fx: 716.667.6837 e: info@ellift.com WWW.ELTLIFT.COM

PLEASE NOTE: WEIGHT AND DIMENSIONS CAN VARY AND ARE APPROXIMATE AND REFERENCE ONLY. SPECIFIC WEIGHT CAN NOT BE DETERMINED UNTIL THE UNIT IS FABRICATED.