

Model CSC



Close Stacking C-Hooks

-The Close Stacking C-Hook has a shorter upper arm for handling various coil widths flush against a vertical surface.

-Integrated lifting bail saves headroom and minimizes inspection normally associated with welded lifting bails.

-High strength alloy steel reduces the physical size of the lift arm allowing movement into confined areas for direct crane loading and unloading.

-All lifters are proof tested exceeding ANSI/ASME B30.20 standards and a test certificate is issued. Also painted safety yellow and clearly marked on both sides with rated capacity to conform to OSHA standards.

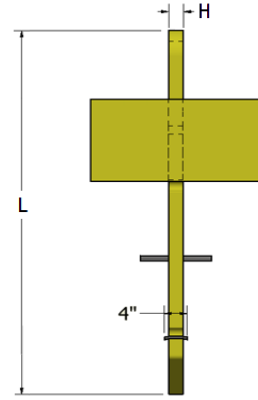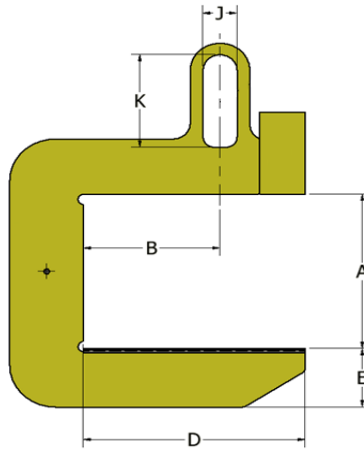

Capacity	Coil Width		Vertical Clearance	Distance to C.O.G.	Lift Arm Length	Lift Arm Depth	Bail Size			Total Height	Approx. Unit Weight	Model Number	
	Max.	Min.					A	B	D				E
Pounds	Inches											Pounds	
10000	36	24	16	18	30	5 3/4	1 1/2	x 4 x	10	36 5/8	492	CSC - 10 - 36 - 24 - 16	
			24				1 1/2	x 4 x	10	44 5/8	571	CSC - 10 - 36 - 24 - 24	
	48	30	16	24	39	6 1/2	1 1/2	x 4 x	10	38	635	CSC - 10 - 48 - 30 - 16	
			24				1 1/2	x 4 x	10	46	721	CSC - 10 - 48 - 30 - 24	
	60	36	16	30	48	7	1 1/2	x 4 x	10	39	767	CSC - 10 - 60 - 36 - 16	
			24				1 1/2	x 4 x	10	48	857	CSC - 10 - 60 - 36 - 24	
20000	36	24	24	18	30	7 1/2	1 3/4	x 4 x	10	48 5/8	909	CSC - 20 - 36 - 24 - 24	
			30				1 3/4	x 4 x	10	54 5/8	998	CSC - 20 - 36 - 24 - 30	
	48	30	24	24	39	8 1/2	1 3/4	x 4 x	10	50 3/8	1205	CSC - 20 - 48 - 30 - 24	
			30				1 3/4	x 4 x	10	56 3/8	1308	CSC - 20 - 48 - 30 - 30	
	60	36	16	30	48	9 1/8	1 3/4	x 4 x	10	43 7/8	1286	CSC - 20 - 60 - 36 - 16	
			24				1 3/4	x 4 x	10	51 7/8	1431	CSC - 20 - 60 - 36 - 24	
	72	42	16	36	57	10	1 3/4	x 4 x	10	45 5/8	1534	CSC - 20 - 72 - 42 - 16	
			24				1 3/4	x 4 x	10	53 3/8	1686	CSC - 20 - 72 - 42 - 24	
	30000	48	30	24	24	39	9 3/4	2	x 6 x	14	56 1/8	1560	CSC - 30 - 48 - 30 - 24
				30				2	x 6 x	14	62 1/8	1688	CSC - 30 - 48 - 30 - 30
60		36	24	30	48	10 3/4	2	x 6 x	14	58 1/8	1971	CSC - 30 - 60 - 36 - 24	
			30				2	x 6 x	14	64 1/8	2115	CSC - 30 - 60 - 36 - 30	
72		42	24	36	57	11 1/2	2	x 6 x	14	59 5/8	2287	CSC - 30 - 72 - 42 - 24	
			30				2	x 6 x	14	65 5/8	2437	CSC - 30 - 72 - 42 - 30	
40000	48	30	30	24	39	10 5/8	2 1/4	x 6 x	14	64 1/8	2091	CSC - 40 - 48 - 30 - 30	
			36				2 1/4	x 6 x	14	70 1/8	2246	CSC - 40 - 48 - 30 - 36	
	60	36	24	30	48	11 1/4	2 1/4	x 6 x	14	60 5/8	2489	CSC - 40 - 60 - 36 - 24	
			30				2 1/4	x 6 x	14	66 5/8	2667	CSC - 40 - 60 - 36 - 30	
	72	42	24	36	57	12 1/4	2 1/4	x 6 x	14	62 1/8	2863	CSC - 40 - 72 - 42 - 24	
			30				2 1/4	x 6 x	14	68 1/8	3047	CSC - 40 - 72 - 42 - 30	
50000	48	30	30	24	39	10 3/4	2 1/4	x 6 x	18	69 7/8	2555	CSC - 50 - 48 - 30 - 30	
			36				2 1/4	x 6 x	18	75 7/8	2740	CSC - 50 - 48 - 30 - 36	
	60	36	28	30	50	11 7/8	2 1/4	x 6 x	18	69 7/8	3073	CSC - 50 - 60 - 36 - 28	
			34				2 1/4	x 6 x	18	75 7/8	3280	CSC - 50 - 60 - 36 - 34	
	72	42	24	36	59	13	2 1/4	x 6 x	18	67 7/8	3443	CSC - 50 - 72 - 42 - 24	
			32				2 1/4	x 6 x	18	75 7/8	3732	CSC - 50 - 72 - 42 - 32	
60000	60	36	28	30	51	13	2 1/4	x 6 x	18	73 1/8	3579	CSC - 60 - 60 - 36 - 28	
			34				2 1/4	x 6 x	18	79 1/8	3812	CSC - 60 - 60 - 36 - 34	
	72	42	28	36	61	14 1/8	2 1/4	x 6 x	18	75 1/8	4127	CSC - 60 - 72 - 42 - 28	
			34				2 1/4	x 6 x	18	81 1/8	4369	CSC - 60 - 72 - 42 - 34	
80000	72	42	38	36	64	14 7/8	3	x 6 x	18	86 7/8	5799	CSC - 80 - 72 - 42 - 38	
			44				3	x 6 x	18	92 7/8	6105	CSC - 80 - 72 - 42 - 44	
100000	84	46	38	42	65	16 1/4	4	x 6 x	18	88 3/8	8664	CSC - 100 - 84 - 46 - 38	
			44				4	x 6 x	18	95 3/8	9091	CSC - 100 - 84 - 46 - 44	

- Notes:
1. Lifter arm length allows sufficient width of larger coils to be handled without protrusion of lift arm past edge of coil.
 2. All loads must be centered under lifting bail.
 3. Please verify that the lifting bail size will suit the crane hook.
 4. Other capacities and load lengths available upon request.

PLEASE NOTE: WEIGHT AND DIMENSIONS CAN VARY AND ARE APPROXIMATE AND FOR REFERENCE ONLY. SPECIFIC WEIGHT CAN NOT BE DETERMINED UNTIL THE UNIT IS FABRICATED.



PHONE 855.800.9568 - FAX 716-667-6837

EMAIL: webinfo@eltlift.com

WEB: www.eltlift.com