

Model TSB


TELESCOPIC SPREADER BEAM

-The "Telescopic Spreader Beam" has an adjustable spread to accommodate various load lengths.

-Two point lift adds extra stability.

-Shackles and Top Rigging is not included but available.

-All lifters are proof tested exceeding ANSI/ASME B30.20 standards and a test certificate is issued. Units are painted safety yellow and clearly marked on both sides with rated capacity to conform to OSHA standards.

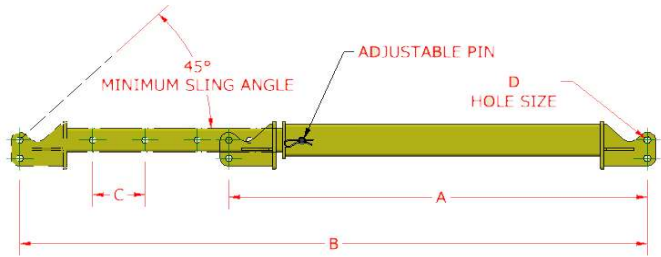

Capacity		MIN SPREAD	MAX SPREAD	SPREAD INCREMENT	HOLE SIZE	SHACKLE SIZE		Approximate Unit Weight	Model Number
		A	B	C	D	SIZE	LOAD CAP.		
LB	TON	Inches				IN	TONNE	LB	
4,000	2	48	72	6	7/8	5/8 IN- 3 1/4 TONNE	70	TSB - 02 - 04 - 06	
		72	120	12	7/8	5/8 IN- 3 1/4 TONNE	101	TSB - 02 - 06 - 10	
		96	168	12	7/8	5/8 IN- 3 1/4 TONNE	134	TSB - 02 - 08 - 14	
		144	240	12	7/8	5/8 IN- 3 1/4 TONNE	199	TSB - 02 - 12 - 20	
10,000	5	48	72	6	1	3/4 IN- 4 3/4 TONNE	75	TSB - 05 - 04 - 06	
		72	120	12	1	3/4 IN- 4 3/4 TONNE	107	TSB - 05 - 06 - 10	
		96	168	12	1	3/4 IN- 4 3/4 TONNE	214	TSB - 05 - 08 - 14	
		144	240	12	1	3/4 IN- 4 3/4 TONNE	320	TSB - 05 - 12 - 20	
20,000	10	48	72	6	1 1/4	1 IN- 8 1/2 TONNE	136	TSB - 10 - 04 - 06	
		72	120	12	1 1/4	1 IN- 8 1/2 TONNE	194	TSB - 10 - 06 - 10	
		96	168	12	1 1/4	1 IN- 8 1/2 TONNE	251	TSB - 10 - 08 - 14	
		144	240	12	1 1/4	1 IN- 8 1/2 TONNE	457	TSB - 10 - 12 - 20	
30,000	15	48	72	6	1 5/8	1 1/4 IN- 12 TONNE	188	TSB - 15 - 04 - 06	
		72	120	12	1 5/8	1 1/4 IN- 12 TONNE	260	TSB - 15 - 06 - 10	
		96	168	12	1 5/8	1 1/4 IN- 12 TONNE	332	TSB - 15 - 08 - 14	
		144	240	12	1 5/8	1 1/4 IN- 12 TONNE	478	TSB - 15 - 12 - 20	
40,000	20	60	84	6	1 7/8	1 1/2 IN- 17 TONNE	264	TSB - 20 - 05 - 07	
		84	132	12	1 7/8	1 1/2 IN- 17 TONNE	348	TSB - 20 - 07 - 11	
		108	180	12	1 7/8	1 1/2 IN- 17 TONNE	432	TSB - 20 - 09 - 15	
		144	240	12	1 7/8	1 1/2 IN- 17 TONNE	719	TSB - 20 - 12 - 20	
50,000	25	60	84	6	2 1/4	1 3/4 IN- 25 TONNE	397	TSB - 25 - 05 - 07	
		84	132	12	2 1/4	1-1/2 IN- 25 TONNE	523	TSB - 25 - 07 - 11	
		108	180	12	2 1/4	1-1/2 IN- 25 TONNE	650	TSB - 25 - 09 - 15	
		144	240	12	2 1/4	1-1/2 IN- 25 TONNE	842	TSB - 25 - 12 - 20	
60,000	30	60	84	6	2 1/4	1-1/2 IN- 25 TONNE	420	TSB - 30 - 05 - 07	
		84	132	12	2 1/4	1-1/2 IN- 25 TONNE	545	TSB - 30 - 07 - 11	
		108	180	12	2 1/4	1-1/2 IN- 25 TONNE	671	TSB - 30 - 09 - 15	
		144	240	12	2 1/4	1-1/2 IN- 25 TONNE	861	TSB - 30 - 12 - 20	
80,000	40	72	96	6	2 1/2	2 IN- 35 TONNE	732	TSB - 40 - 06 - 08	
		96	144	12	2 1/2	2 IN- 35 TONNE	926	TSB - 40 - 08 - 12	
		120	180	12	2 1/2	2 IN- 35 TONNE	1,120	TSB - 40 - 10 - 15	
		144	240	12	2 1/2	2 IN- 35 TONNE	1,313	TSB - 40 - 12 - 20	
100,000	50	72	96	6	2 1/2	2 IN- 35 TONNE	745	TSB - 50 - 06 - 08	
		96	144	12	2 1/2	2 IN- 35 TONNE	933	TSB - 50 - 08 - 12	
		120	180	12	2 1/2	2 IN- 35 TONNE	1,122	TSB - 50 - 10 - 15	
		144	240	12	2 1/2	2 IN- 35 TONNE	1,311	TSB - 50 - 12 - 20	

- Notes:
1. Minimum sling angle 45 deg.
 2. Shackle dimensions refers to CROSBY G-2130, Bolt Type Shackle.
 3. Other capacities and lengths available upon request.



PLEASE NOTE: WEIGHT AND DIMENSIONS MAY VARY AND ARE APPROXIMATE AND FOR REFERENCE ONLY. SPECIFIC WEIGHT CAN NOT BE DETERMINED UNTIL THE UNIT IS FABRICATED.

PHONE 855.800.9568 - FAX 716-667-6837

EMAIL: webinfo@eltlift.com

WEB: www.eltlift.com