

Model LHB




Fork Lift Hook Beam

-The Fork Lift Hook Beam converts a fork lift truck into a maintenance-free low cost overhead crane with a single swivel hook pick point.

-Safety chain anchor points and two load rated 48" safety chains with clevis grab hooks.

-Each lifter is proof tested exceeding ANSI/ASME B30.20 standards and a test certificate is issued. LHB's are painted safety yellow and clearly marked on both sides with rated capacity to conform to OSHA standards.

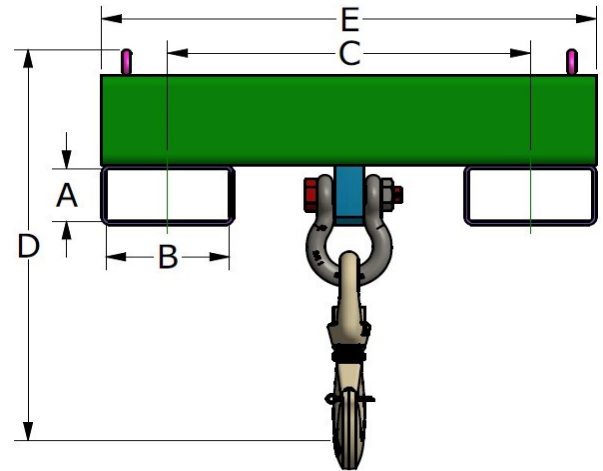

Model Number	Capacity	Fork Tube Height	Fork Tube Width	Fork Tube Spacing	Total Height	Outside Width	Shackle Rating	Hook Rating	Approx. Unit Weight (lb.)
		A (in)	B (in)	C (in)	D (in)	E (in)			
LHB2	2T	2-1/2	7-1/2	16	16	24	2t	2t	60
LHB3	3T	2-1/2	7-1/2	18	17-3/8	26	3.25t	3t	65
LHB4	4T	2-1/2	7-1/2	20	19-7/16	28	4.75t	5t	75
LHB5	5T	2-1/2	7-1/2	20	19-7/16	28	4.75t	5t	80
LHB6	6T	2-1/2	7-1/2	22	24-1/2	30	6.5t	7t	95
LHB8	8T	3-1/2	7-1/2	22	27-7/16	30	8.5t	11t	108
LHB10	10T	3-1/2	7-1/2	22	28	30	9.5t	11t	135
LHB15	15T	5-1/2	11-1/2	36-1/2	20-11/16	49	N/A	15t	261
LHB22	22T	5-1/2	11-1/2	36-1/2	26-5/16	49	N/A	20t	355

* Products highlighted in yellow ARE NOT eligible for Express Ship

- Notes:
1. Higher capacity units are designed using channel instead of rectangular tube, with no shackles.
 2. Please verify that the fork tube sizes will fit fork lift.
 3. Other capacities and dimensions available upon request.



PHONE 855.800.9568 - FAX 716-667-6837

EMAIL: webinfo@eltlift.com

WEB: www.eltlift.com

PLEASE NOTE: WEIGHT AND DIMENSIONS CAN VARY AND ARE APPROXIMATE AND FOR REFERENCE ONLY. SPECIFIC WEIGHT CAN NOT BE DETERMINED UNTIL THE UNIT IS FABRICATED.